
NOTICE OF PRODUCT CERTIFICATION

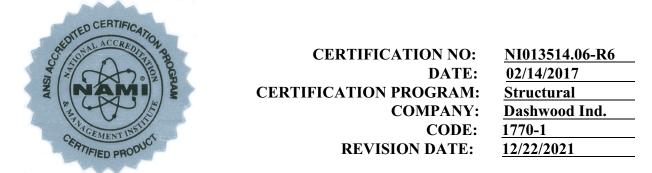

To verify that the "Notice of Product Certification" is valid, please visit <u>www.NAMICertification.com</u> to assure that the product is active and currently listed. This certification represents product conformity to the applicable specification and that certification criteria has been satisfied. A NAMI approved certification label must be applied to the product to claim certification status. Please review and advise NAMI if any corrections are required to this document.

COMPANY NAME AND ADDRESS		PRODUCT DESC	CRIPTION
Dashwood Industries, Inc.	Series "Fiber-Classic/Smooth-Star" Flush		
28648 Centre Road	Glazed Fiberglass In-Swing Side-Hinged		
Strathroy, ON N7G 3H8	Door w/Glazed Sidelites		
		Configuration: Glazing: Insulating Gla	
	Frame:	W-1740mm(68.5")	H-2073mm(81.63")
	Panel:	W-910mm(35.94")	H-2008mm(79.06")
	DLO:	W-660mm(26")	H-1605mm(63.19")

AAMA/WDMA/CSA 101/I.S.2/A440-08 A440S1-09 Design Pressure: ±2400 Pa (50 psf) Positive Design Pressure: 2400 Pa (50 psf) Negative Design Pressure: 2640 Pa (55 psf) Water Penetration Resistance Test Pressure: 290 Pa (6.06 psf)	SPECIFICATION	PRODUCT RATING
Canadian An Innitiation/Exitit atton Level. A5	AAMA/WDMA/CSA 101/I.S.2/A440-08	Class R-PG50 1740 x 2073 (69 x 82)-LW SHD Design Pressure: ±2400 Pa (50 psf) Positive Design Pressure: 2400 Pa (50 psf) Negative Design Pressure: 2640 Pa (55 psf) Water Penetration Resistance Test Pressure: 290 Pa (6.06 psf) Canadian Air Infiltration/Exfiltration Level: A3

Product Tested By: Report No: Expiration Date: Architectural Testing, Inc. E2542.03-501-47/W-1803/W-1805/W-1808

February 28, 2025

Administrator's Signature:

NATIONAL ACCREDITATION AND MANAGEMENT INSTITUTE, INC.

4794 George Washington Memorial Highway Hayes, VA 23072 Tel: (804) 684-5124 Email: nami@namiinc.com